

# User Guide: simpleRTK 4 Optimum

- [Product Overview](#)
- [Get started](#)
  - [Step A: Connect the antenna](#)
  - [Step B: Connect to u-center 2](#)
  - [Step C: Get RTK corrections](#)
- [Hardware](#)
  - [Pinout](#)
  - [Power](#)
  - [GPS/GNSS Antenna](#)
  - [Communication ports](#)
    - [USB GPS](#)
    - [USB XBee](#)
    - [Pixhawk connector](#)
    - [Arduino rails](#)
    - [High Power \(HP\) XBee socket](#)
    - [Special function pins](#)
    - [LEDs](#)
    - [Buttons and switches](#)
- [Accessories](#)
  - [How to add plugin](#)

## Product Overview

You can use simpleRTK 4 Optimum as a independent GNSS receiver by connecting it to your PC or tablet. Additionally, it can be used as an add-on board for your projects, such as an Arduino shield.

The main component of simpleRTK 4 Optimum is u-blox X20 all band (L1/L2/L5 and new L6/E6) RTK GNSS module.

### Important before use:

This is a traditional RTK module. It only finds satellites outdoors with good view of the sky. If you try to use it next to the window it won't work well.

The module needs 10 seconds to boot, be patient after connecting to the PC



## Get started

Before start: We recommend that you do not change any configurations or update the firmware. The receiver comes pre-configured as a Rover.

### Step A: Connect the antenna


1. Connect the GNSS antenna(s) to your receiver.
2. Place the GNSS antenna(s) outdoors with a good view of the sky for testing functionality. Otherwise, you won't have any satellites in view nor receive signal data.

### Step B: Connect to u-center 2

You can download u-center 2 [here](#).

It has been tested on Windows 10 and Windows 11 (64 bit) platform. Once the installation has completed successfully, you need to enter your u-blox support portal account credentials and log in with a browser. If you don't have a u-blox account click **Register**. Follow this quick guide to connect.

3. Connect the receiver to your PC via the USB port labelled as **POWER+GPS**.
4. Click the Devices icon on the left menu bar, click + icon. Select the COM port of the device. Select **Autobauding** for automatic detection of the baud rate. Click **Add device**.

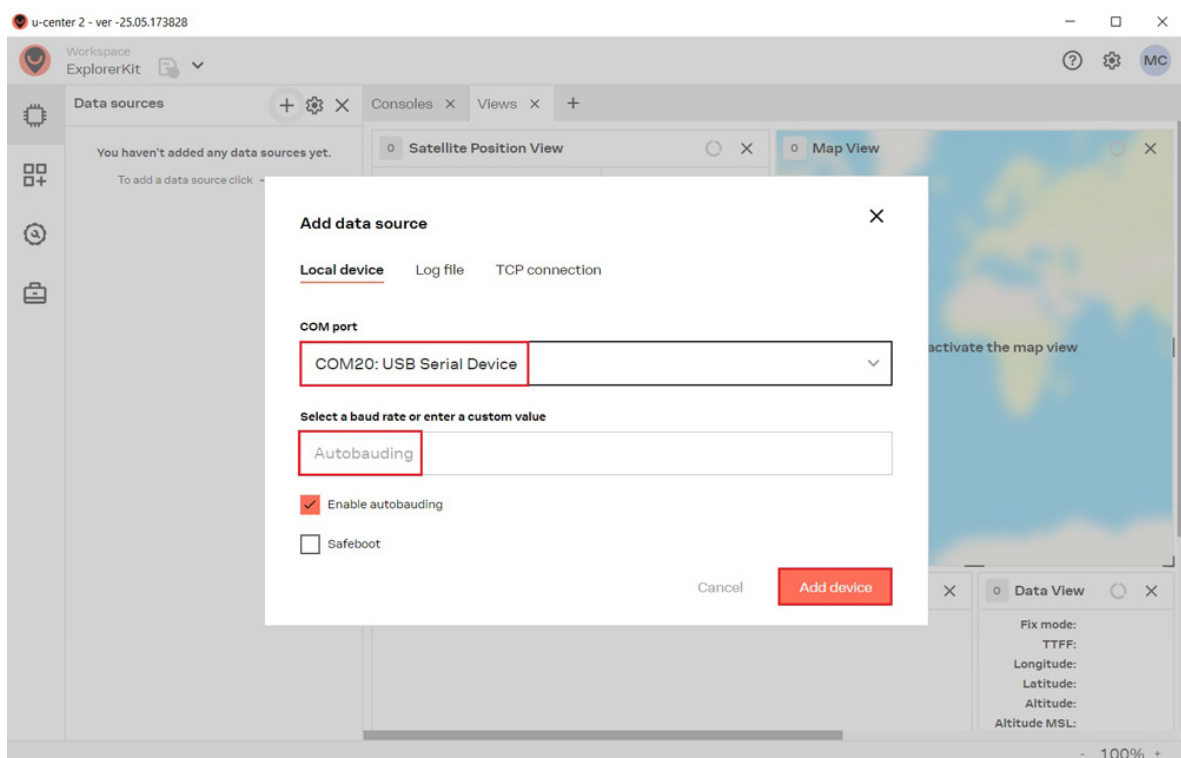

## Step C: Get RTK corrections

To achieve centimeter- or millimeter-level accuracy with our GNSS receivers, RTK corrections are required. NTRIP (Networked Transport of RTCM via Internet Protocol) is a protocol used for streaming GNSS data over the internet. It facilitates the transmission of real-time correction data from a reference station to a rover or user device.

If you don't have your own base station for corrections, you can find third party NTRIP corrections at [RTK Correction Services in your Country](#) to gain credential (server address, port, user and password) of NTRIP. You can connect to NTRIP using a PC, smartphone, or our Communication Plugins.

Before starting, make sure your receiver is configured as a Rover. Follow this hookup guide to receive corrections on your PC.


- To connect to the caster for correction data, **UBX-NAV-PVT** or NMEA standard **GGA** messages must be enabled. You can skip this step if you load our Rover configuration file.

The screenshot shows the 'Device configuration' window for 'Device - COM10'. The 'Configuration items' list on the left has 'NMEA\_ID\_GGA\_UART1' selected and highlighted with a red box. The right panel shows the configuration for 'CFG-MSGOUT-NMEA\_ID\_GGA\_UART1'. The 'Value (raw)' field is set to '1'. The 'Write to layer' section has checkboxes for 'RAM', 'BBR', and 'Flash', all of which are checked. The 'Action' buttons are 'Set' and 'Delete'. Below this, a table shows the configuration changes:

| Keyname (Key ID)               | Layer     | Value (raw) | Action         |
|--------------------------------|-----------|-------------|----------------|
| 1 CFG-MSGOUT-NMEA_ID_GGA_UART1 | RAM (0)   | 1           | Set Edit Clear |
| 2 CFG-MSGOUT-NMEA_ID_GGA_UART1 | FLASH (2) | 1           | Set Edit Clear |
| 3 CFG-MSGOUT-NMEA_ID_GGA_UART1 | BBR (1)   | 1           | Set Edit Clear |

At the bottom, there are buttons for 'Save changes', 'Save as...', 'Revert changes', and 'Clear all'. A checkbox for 'Send Configurations in batch mode' is checked, and a 'Send' button is visible.


- Go to **Tools and Service** → **Services** → **NTRIP**. Enter the hostname or IP address, port, username and password of the NTRIP caster. Click **Save and Retrieve** to get an up-to-date list of all available mount points. Select mount point then click **Connect**.

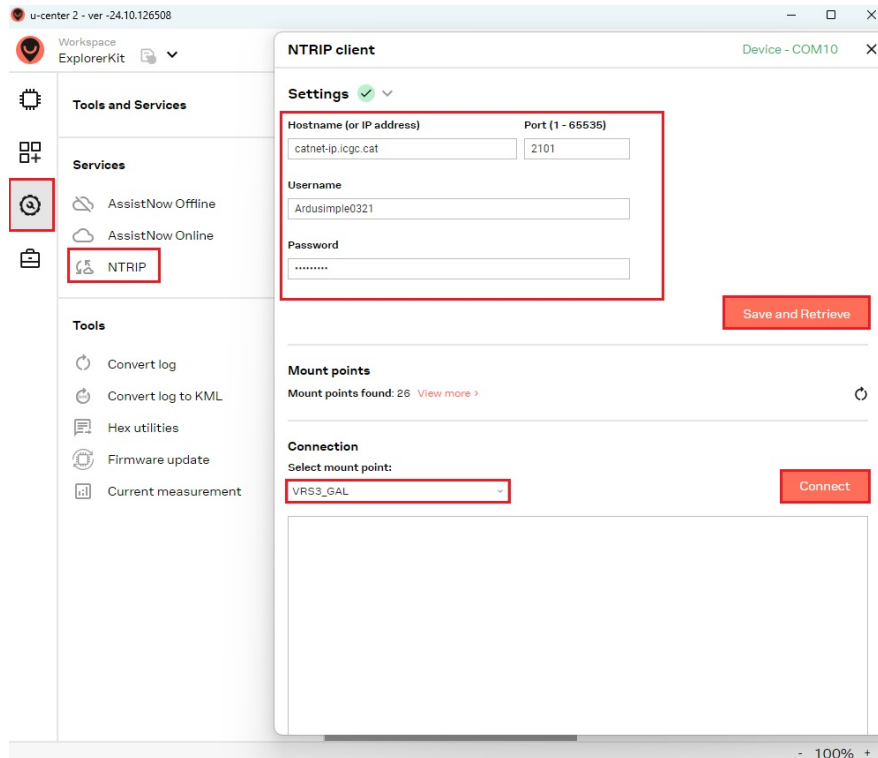


If you are an advanced user seeking detailed information, please refer to the integration guide at [u-blox ZED-X20 configuration page](#).

## Hardware

### Pinout

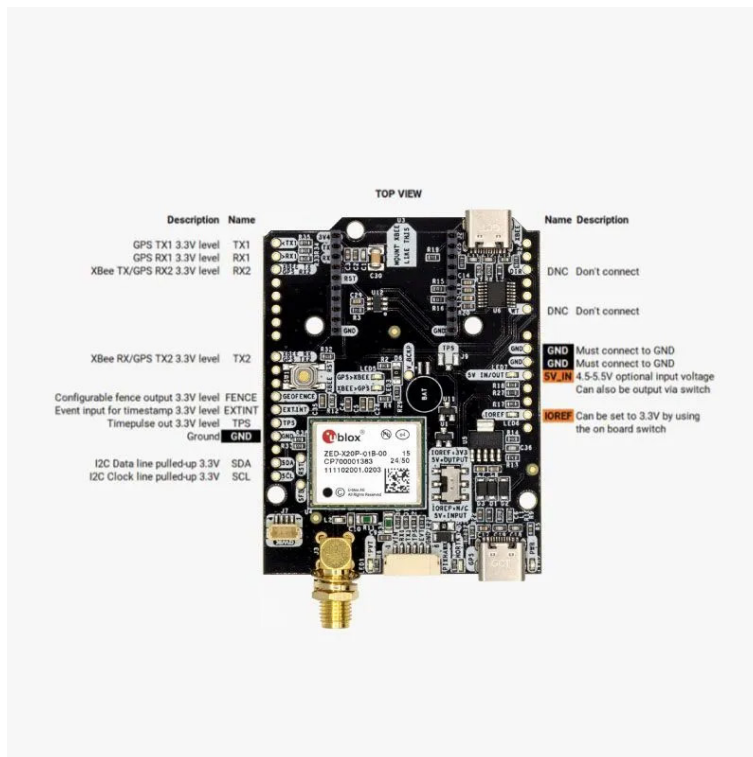

### Power

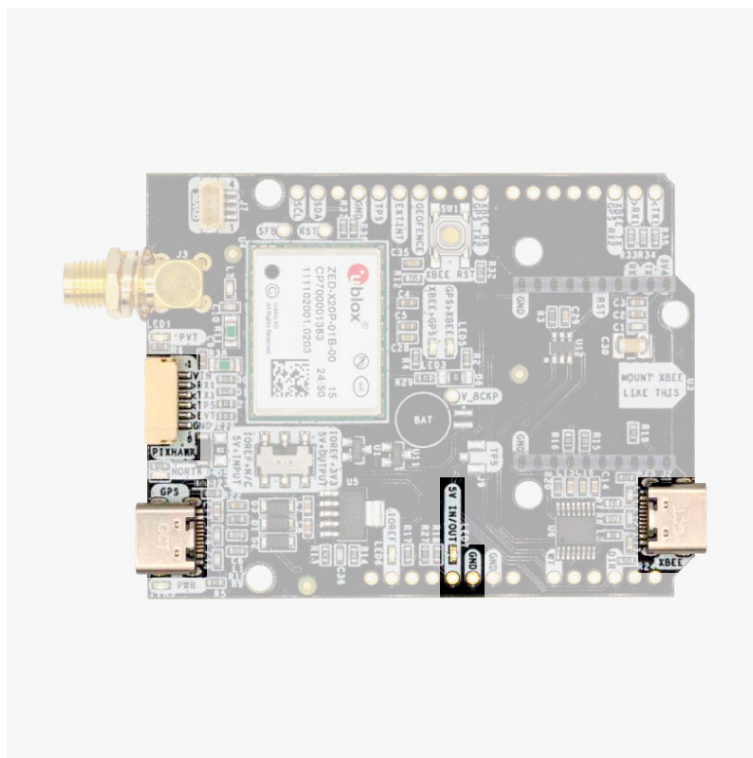

The simpleRTK 4 Optimum can be powered from 4 different sources:

- GPS USB port
- XBEE USB port
- Pixhawk connector
- Arduino rail


Only 1 of them is needed to use the board, but you can also connect the 4 at the same time, there's no risk.

The simpleRTK 4 Optimum has a High Power (HP) XBee socket. You can connect any XBee accessory to it.

If you connect a device that requires high power to the XBee socket, you will have to make sure your power supply can provide this power.

- Use only high quality USB-C cables, not longer than 1 meter.
- If you connect simpleRTK3B Pro through a USB hub to your PC/Tablet or your PC has low power USB ports, you will have to connect the second USB port directly to a wall plug or high power USB port.

## GPS/GNSS Antenna

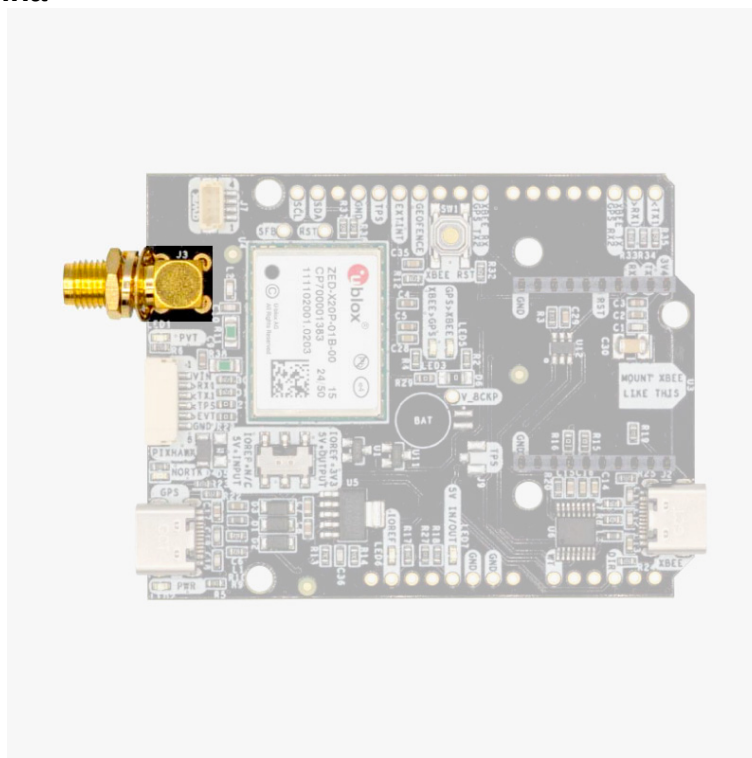

simpleRTK 4 Optimum does not include, but requires a good quality GPS/GNSS antenna.

simpleRTK 4 Optimum supports full L1/L2/L5 bands. If you want to get the most out of this module, we recommend a [Triple Band simpleANT3B series antenna](#).

The board supports both active antennas (with 3.3V supply) and passive antennas. The maximum output current is 150mA @ 3.3V.

If you use it with the traditional cheap GPS antennas widely available, you will not achieve the expected performance.

**IMPORTANT:** It is mandatory to connect the antenna before powering the board.

The installation of the antenna is also a key point to achieve the best results. The GPS/GNSS antenna should always be installed with the maximum possible view of the sky.


In addition, if possible, it should be installed with a metallic plane behind, e.g. rooftop of the car, on a metal plate bigger than 20cm, etc.

If you want to learn how installation impacts performance, please have a look at our [GPS/GNSS antenna installation guide](#) or watch [this video](#).

## Communication ports

simpleRTK 4 Optimum board has a few interfaces that we will now explain in detail.

## USB GPS

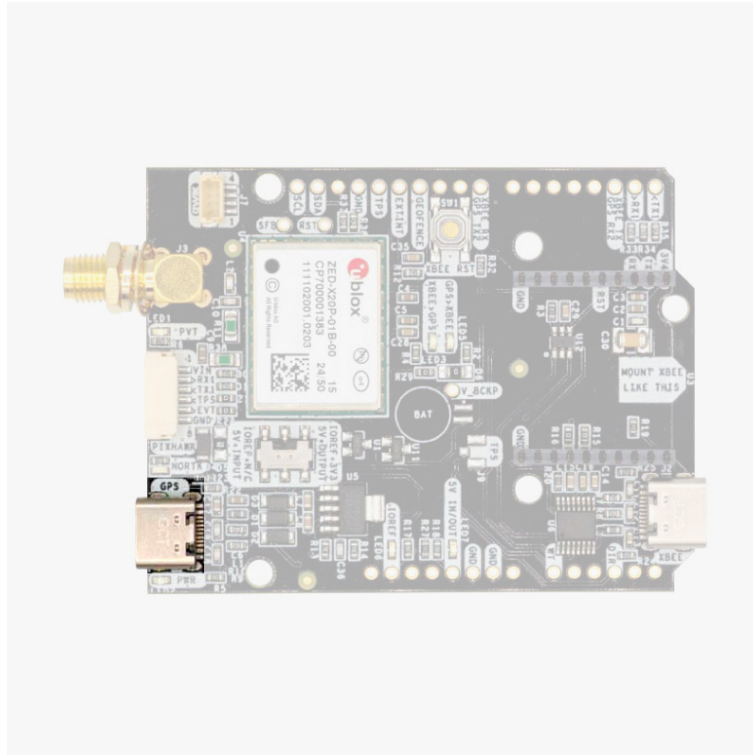


This USB-C connector gives you access to the native USB from the ZED-X20P module. You can receive NMEA with the position, or have full access to the ZED-X20P using the u-center 2.

**If you use Windows10, no drivers need to be downloaded so ignore the next paragraph ?**

If you experience problems with above drivers in Windows 7/8 devices, try with the [alternative driver](#). You can also connect this USB to your mobile phone using our OTG cable.

## USB XBee

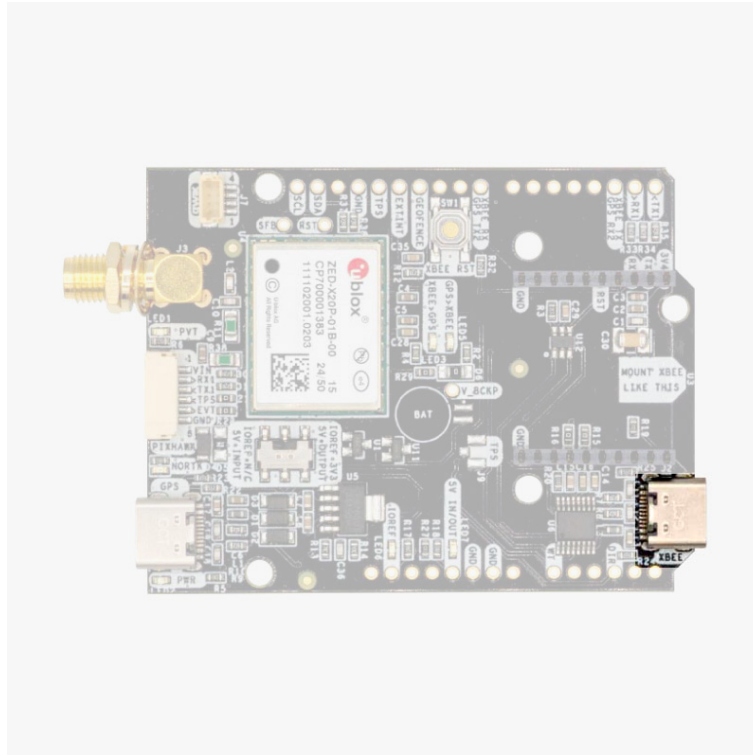


This USB-C connector gives you access to the UART of the XBEE radio (if you mount one), via an FTDI USB-to-UART converter.

We find very practical to use this connector to power the board, so you can then connect and disconnect the GPS USB as your wish, without removing the power to the board. You can use any USB wall plug adapter you find at home.

To use this connector only as a power source, you don't need any driver. You can use your PC, or connect to your USB wall adapter.

To use this connector to configure an XBee radio, you will need the [VCP driver from FTDI](#).

## Pixhawk connector

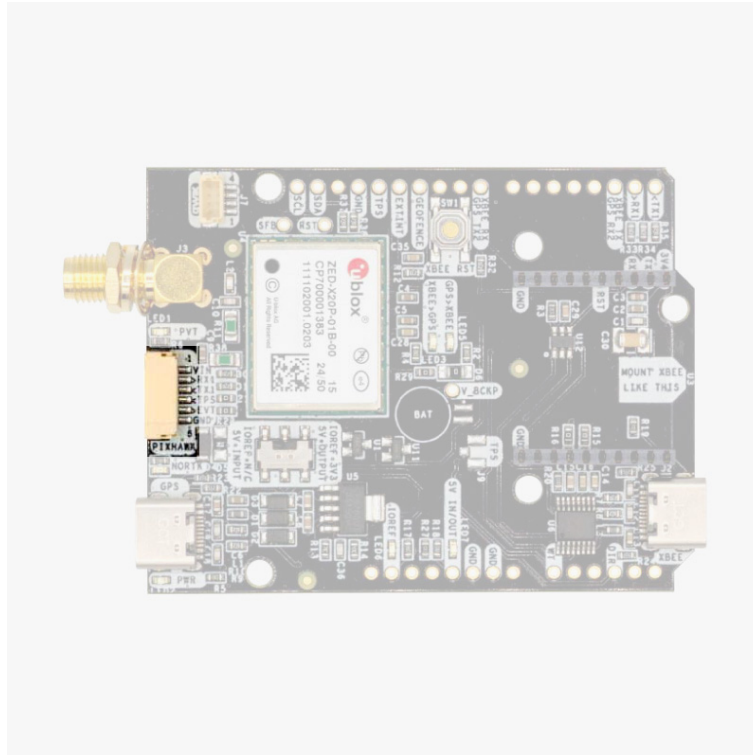

This connector is a standard JST GH that can be used to connect the simpleRTK 4 Optimum to a Pixhawk autopilot.

You can also use this connector to power the board.


The Pixhawk JST-GH connector is following the Pixhawk standard:

- 1: 5V\_IN
- 2: ZED-X20P UART1 RX (3.3V level)
- 3: ZED-X20P UART1 TX (3.3V level)
- 4: Timepulse output (3.3V level)
- 5: Event input (3.3V level)
- 6: GND

In case you want to build your own cable to connect to this connector, the mating aerial connector is JST GHR-06V.

Please note that the board only includes GPS and doesn't include magnetometer.


## Arduino rails

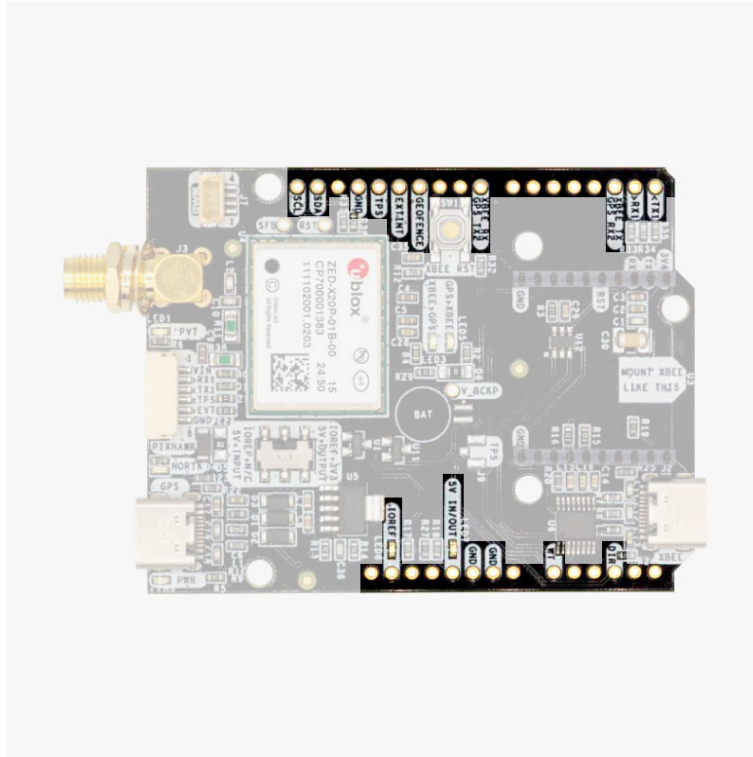

simpleRTK 4 Optimum has optional rails to connect to other arduino UNO compatible devices.

- **GND:** ground is available in the standard arduino pins. You should always connect this line to your other board.
- **5V IN/OUT:**
  - When the LED next to this pin is OFF, can power simpleRTK 4 Optimum from this pin.  
For example, just mount it on top of an Arduino UNO board, and simpleRTK4 Optimum will turn ON. (check if your arduino can power 300mA @ 5V shields).
  - Alternatively, you can now use simpleRTK 4 Optimum to power other shields. Just turn ON the switch "5V=OUTPUT" and simpleRTK 4 Optimum board will output 5V at this pin.
- **IOREF:** TX1, RX1, TX2, and RX2 always operate at 3.3V logic levels.
- **TX1,RX1,TX2,RX2,SDA,SCL:** These pins always operate at 3.3V logic levels.
  - TX1: ZED-X20P UART1 TX
  - RX1: ZED-X20P UART1 RX
  - TX2: ZED-X20P UART2 TX (this pin is also connected to Xbee UART RX).
  - RX2: ZED-X20P UART2 RX (this pin is also connected to Xbee UART TX).
  - SDA: ZED-X20P i2C SDA
  - SCL: ZED-X20P i2C SCL

## High Power (HP) XBee socket

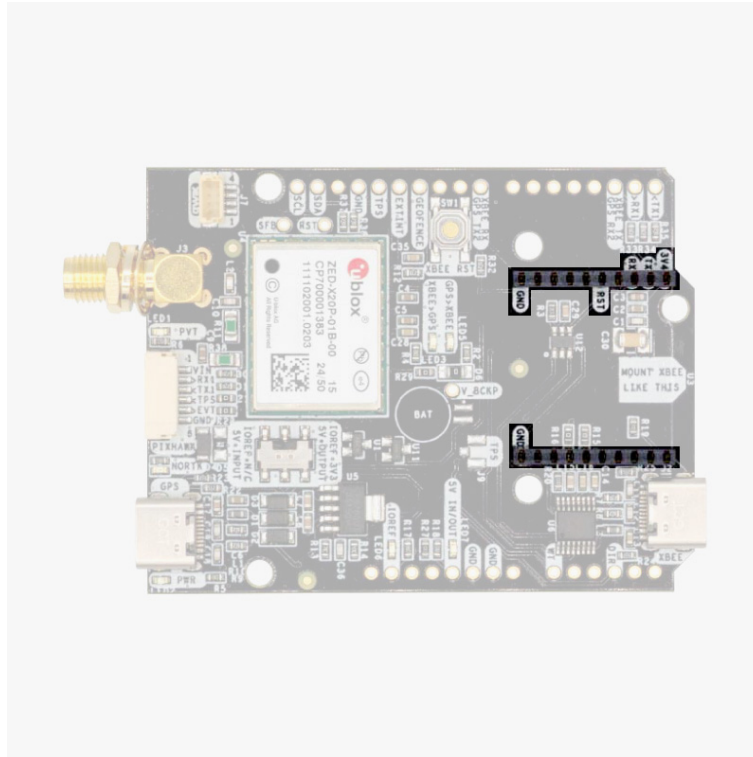


The simpleRTK 4 Optimum has a High Power (HP) XBee socket. You can use this socket to connect an XBee compatible radio. The following pins are available:

- VCC, which is a 3.3V output with maximum current 1A constant and peak 1.5A.
- XBee UART RX, at 3.3V level
- XBee UART TX, at 3.3V level
- GND

The XBee socket is connected to ZED-X20P. [Check How to add plugin.](#)

## Special function pins

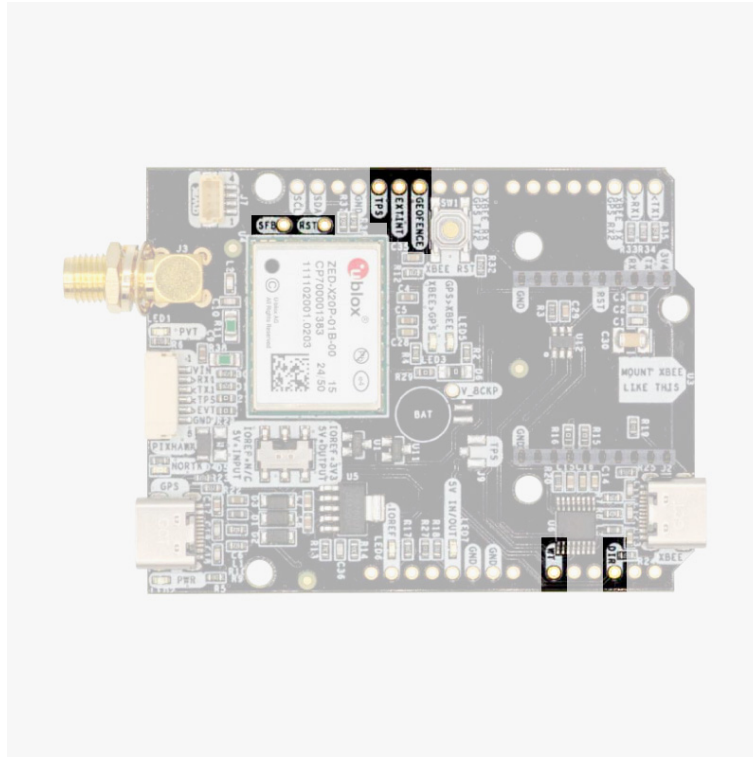


In addition to above, there's also a few additional pins available for the most advanced users. If you are going to use simpleRTK 4 Optimum connected on top of an Arduino or Raspberry Pi and you don't use any of these pins, it's recommended to not connect the pins: you can cut the header in this pins to avoid the connection, and prevent unexpected behaviors.

- Timepulse (TPS): 3.3V configuration time pulse output.
- Extint (EXTINT): time synchronization input, maximum voltage 3.6V.  
This input is filtered to avoid glitches.
- Geofence (GEOFENCE): geofence input/output pin from ZED-X20P.
- Safeboot (SFB)
- Reset\_N (RST)
- Wheeltick (WT)
- Direction (DIR)

Remember that you can add a second XBee socket to your board with the [Shield for Second XBee socket](#).


## LEDs

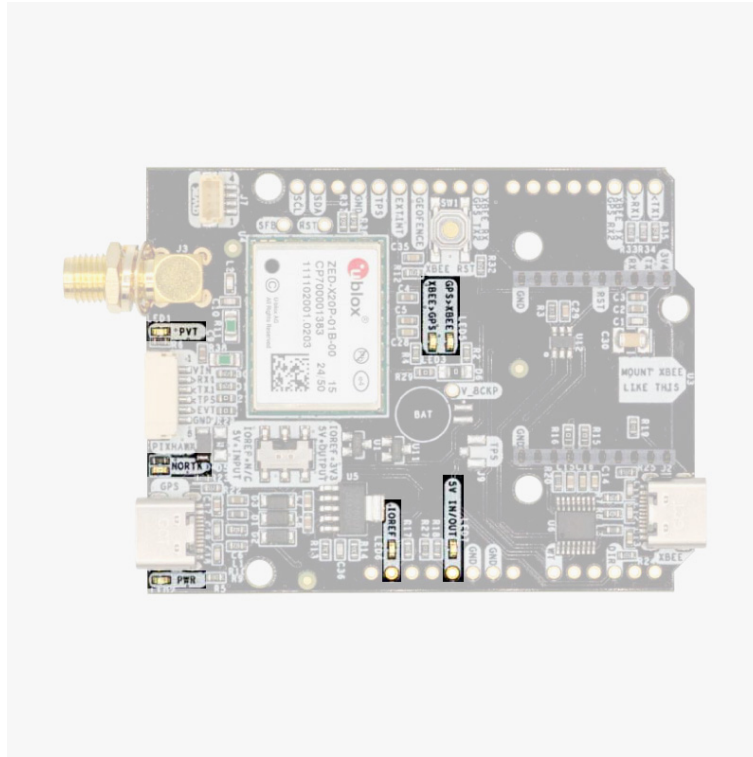

The board includes 7 status LEDs, which indicate that:

- **POWER:** the simpleRTK 4 Optimum board has power.
- **PVT:** LED lights when it was possible to calculate a position from the available satellite visibility.
- **NORTK:** ON when no RTK, blinking when receiving correction data, OFF when devices is in RTK FIXED mode.
- **XBEE>GPS:** The XBEE radio is receiving data over the air and sending it to the ZED-X20P.
- **GPS>XBEE:** The ZED-X20P is outputting data that the XBEE radio is receiving and sending over the air.
- **5V IN/OUT:** Will indicate you if there is voltage on that pin.
- **IOREF:** Will indicate you if the IOREF pin is enabled, which activates the UARTs on arduino rails.

## Buttons and switches

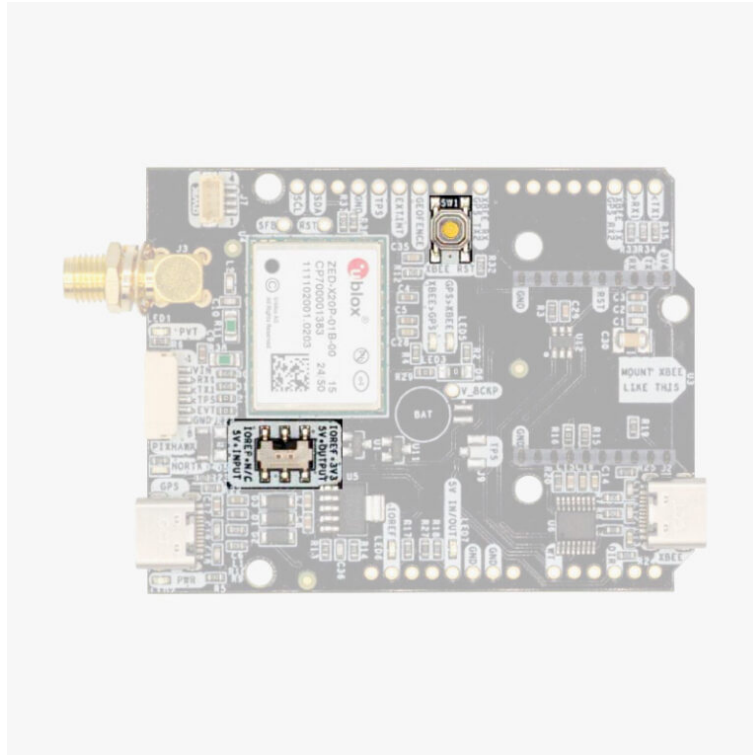

There's only one button: Xbee Reset, and the good news is that you probably will not have to use it. This button is used to program the Xbee radio if you want to update firmware, etc.

You will find 2 switches:

- The switch under the Xbee socket lets you choose which UART you want to connect to the Xbee socket.
- The switch next to the "POWER" led let's you enable IOREF with 3.3V and 5V arduino pin as output so the board can power accessories like [Shield for Second Xbee socket](#).

***If you need additional information, such as upgrading firmware, configuring the receiver as a base or rover please refer to the [u-blox ZED-X20P Configuration Page](#).***

## Accessories


You can add any of these features (and more) with our XBee plugins:



Plugins  
[Radio module  
450MHz](#)



Plugins  
[WiFi NTRIP  
Master](#)



Plugins  
[WiFi NTRIP  
Master  
\(external  
antenna  
version\)](#)



Plugins  
[Radio module  
Long Range  
\(LR\)](#)




Plugins  
[Radio module  
eXtra Long  
Range \(XLR\)](#)



Plugins  
[Radio Module  
Medium  
Range \(MR\)](#)




Plugins  
[Bluetooth  
module](#)



Sale!  
[Made in  
Europe  
Plugins  
Ethernet  
NTRIP Master](#)



Sale!  
[Plugins  
4G NTRIP  
Master](#)




Plugins  
[BT+BLE  
Bridge](#)




Sale!  
[Plugins  
CANBus  
GNSS Master](#)



Plugins  
[RS232 plugin](#)



Sale!  
[Made in  
Europe  
Plugins  
PointPerfect  
L-Band  
Corrections  
Receiver  
NEO-D9S](#)



Plugins  
[Serial  
Datalogger to  
microSD](#)

## How to add plugin

You can add plugins using the Xbee socket or Arduino rails. Just plug the plugin into the Xbee socket in the correct orientation. Then power the receiver. Follow the user guide of each accessories if it need any configuration.

